

HUTCHINSON

WHEELS & BEADLOCKS



HUTCHINSON INDUSTRIES
BRINGS YOU THE ULTIMATE
OFF-ROAD WHEEL.

EASY TO INSTALL
D.O.T. COMPLIANT

AIR DOWN TO IMPOSSIBLY LOW AIR PRESSURES
FOR ENHANCED PERFORMANCE AND TRACTION
ON ROCK, SAND, MUD & SNOW.

EXTREME
ADVENTURE



HUTCHINSON®
WORLDWIDE



PRODUCT CATALOG

JEEP

Commander



WA-0594



size 17 x 8.5"
bolt pattern 5H at 5.0" (127 mm)BCD
lug style ½" 60° conical nut
hub bore diameter 2.81" (71.5 mm)
SAE rated load 2,300 lbs. at 60 psi
backspacing 4.63" (117.6 mm)
construction Cast aluminum alloy
*snap-in hub cover included

2007+ Wrangler JK
2006+ Jeep Commander

WA-0398



size 15 x 8.0"
bolt pattern 5H at 4.5" (114,3 mm)BCD
lug style ½" 60° conical nut
hub bore diameter 2.89" (73.4 mm)
SAE rated load 2,300 lbs. at 35 psi
backspacing 3.63" (92.2 mm)
construction Cast aluminum alloy
*snap-in hub cover included

1997 - 2006
Wrangler TJ

Wrangler



WA-1549



size 17 x 8.5"
bolt pattern 5H at 4.5" (114,3 mm)BCD
lug style ½" 60° conical nut
hub bore diameter 2.81" (71.5 mm)
SAE rated load 2,300 lbs. at 60 psi
backspacing 4.63" (117.6 mm)
construction Cast aluminum alloy
*snap-in hub cover included

WA-0566



size 17 x 8.5"
bolt pattern 5H at 5.5" (139,7 mm)BCD
lug style ½" 60° conical nut
hub bore diameter 4.63" (117.6mm)
SAE rated load 2,300 lbs. at 60 psi
backspacing 4.63" (117.6 mm)
construction Cast aluminum alloy
*snap-in hub cover included

1955 - 1985
CJ

DAIMLER

G-Wagon



WA-1207



size 16 x 7.5"
bolt pattern 5H at 5,1" (130 mm)BCD
lug style 60° conical
hub bore diameter 84.6 mm
SAE rated load 3300 lbs. at 65 psi
Offset 37 mm
construction Cast aluminum alloy
*Not designed for hub cover

1998 - ...
G-Wagon

WA-0491



size 16 x 7.5"
bolt pattern 5H at 5,1" (130 mm)BCD
lug style 60° conical
hub bore diameter 85.5 mm
SAE rated load 3300 lbs. at 72 psi
Offset 63 mm
construction Cast aluminum alloy

LANDROVER

Defender



WA-0604



size 16 x 7.0"
bolt pattern 5H at 6,5" (165.1 mm)BCD
lug style M16 shank nut (hub piloted)
hub bore diameter 4.44" (112.8 mm)
SAE rated load 3,307 lbs. at 65 psi
backspacing 4.89" (124.3 mm)
construction Cast aluminum alloy

1999 - 2006
 Defender

WA-1352



size 16 x 8.0"
bolt pattern 5H at 6,5" (165.1 mm) BCD
lug style M16 shank nut (hub piloted)
hub bore diameter 4.45" (113 mm)
SAE rated load 3,750 lbs. at 80 psi
backspacing 4.45" (113 mm)
construction Cast aluminum alloy

TOYOTA

Land Cruiser



LC200



LC 100 - 105



LC 80

WA-0550



size 17 x 8.5"
bolt pattern 5H at 5,9" (150 mm)BCD
lug style M14 shank nut (hub-piloted)
hub bore diameter 4.34" (110.1 mm)
SAE rated load 3,200 lbs. at 60 psi
backspacing 5.81" (147.6 mm)
construction Cast aluminum alloy

1999 - 2007
 Land Cruiser
 2007 - 2009
 Tundra

WA-0567 / WA-0568



size 17 x 8.5"
bolt pattern 6H at 5,5" (139.7 mm)BCD
lug style M12 shank nut (hub-piloted)
hub bore diameter 4.19" (106.4 mm)
SAE rated load 2,750 lbs. at 60 psi
backspacing 4.51" (114.5 mm)
construction Cast aluminum alloy
 *snap-in hub cover included

Make	Model	Year
Toyota	Tundra	1999 - 2006
	4-Runner	1986 - 2009
	Tacoma	1995 - 2009
	PreRunner	1995 - 2003
	Sequoia	2000 - 2009
	Land Cruiser	1969 - 1992
	FJ Cruiser	2007 - 2009
	T100	1993 - 1998

FORD

F250 / F350



WA-1249



size 17 x 8.5"
bolt pattern 8H at 6,7" (170 mm)BCD
lug style M14 + flange nut (hub-piloted)
hub bore diameter 4.93" (125.3 mm)
SAE rated load 2,900 lbs. at 60 psi
backspacing 4.50" (114.4 mm)
construction Cast aluminum alloy
 *snap-in hub cover included

Make	Model
Ford	Excursion
	F250 HD/SD
	F350 HD/SD SRW

DODGE / GM



WA-0565



size 17 x 8.5"
bolt pattern 6H at 5.5" (139,7 mm)BCD
lug style M14 60° conical nut
hub bore diameter 3.06" (77.8 mm)
SAE rated load 2,750 lbs. at 60 psi
backspacing 4.51" (114.5 mm)
construction Cast aluminum alloy
 *snap-in hub cover included

WA-1174



size 17 x 8.5"
bolt pattern 8H at 6.5" (165,1 mm)BCD
lug style M14 60° conical nut
hub bore diameter 4.77" (121.3 mm)
SAE rated load 2,900 lbs. at 60 psi
backspacing 4.50" (114.4 mm)
construction Cast aluminum alloy
 *snap-in hub cover included

WA-1175



size 17 x 8.5"
bolt pattern 8H at 6.5" (165,1 mm)BCD
lug style M14 60° conical nut
hub bore diameter 4.77" (121.3 mm)
SAE rated load 2,900 lbs. at 60 psi
backspacing 4.50" (114.4 mm)
construction Cast aluminum alloy
 *snap-in hub cover included



Make	Model	Year
GMC	Sierra	1500
		2500
	Yukon	4WD
Chevy	C/K	1500 4WD
	Tahoe	2WD
		4WD
	Suburban	2WD
		4WD
	Silverado	1500
		2500
	Avalanche	
	C/K	1500 4WD

Make	Model	Year
GMC	Sierra	1500 HD
		2500 HD
	3500	
Chevy	Yikon 8 lug	4WD
	Silverado	2500 HD
		3500 SRW
	Suburban	2500 HD
Dodge	Avalanche	2500 4WD
	Power Wagon	
	Ram 2500	
	Ram 3500	

HUMMER

H2



WA-0538



size 17 x 8.5"
bolt pattern 8H at 6.5" (165,1 mm)BCD
lug style M14 60° conical nut
hub bore diameter 4.595" (100 mm)
SAE rated load 2,750 lbs. at 50 psi
backspacing 5.60" (142.2 mm)
construction Cast aluminum alloy
 *snap-in hub cover included

Make	Model	Year
Hummer	Hummer	H2

H3



WA-0615



size 17 x 7.5"
bolt pattern 6H at 5.5" (139,7 mm)BCD
lug style M12 60° conical nut
hub bore diameter 3.938" (100 mm)
SAE rated load 2,900 lbs. at 60 psi
backspacing 4.50" (114.4 mm)
construction Cast aluminum alloy
 *snap-in hub cover included

Make	Model	Year
Hummer	Hummer	H3


BEADLOCK HUTCHINSON



Traction and safety for every off-road adventure — in a design that's DOT-COMPLIANT.

- Increase vehicle mobility and maneuverability
- No special tools required for installation
- Seals in low-pressure air and keeps out all foreign materials like dirt, sand and water.


Beadlocks

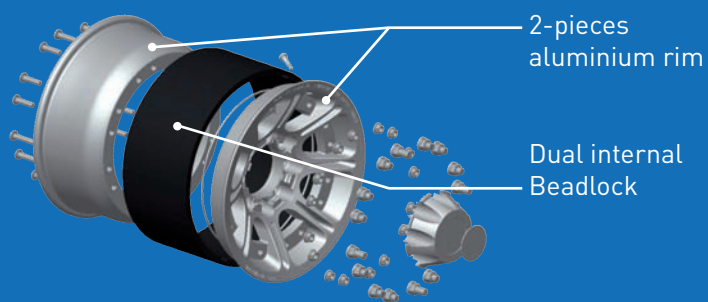

Exploded view
Hutchinson wheel assembly

Our beadlock is a molded rubber sleeve that fits between the tyre beads on a flat rim wheel. Once installed, it locks both tyre beads against your DOT-compliant rims. As every dedicated rock crawler, bogger or beach bugging fisherman knows as you lower air-pressure, you increase the area of the tyre's footprint in order to gain greater traction.

Hutchinson Wheels will allow you to safely air-down to extremely low pressures with no worry of a blow-out.

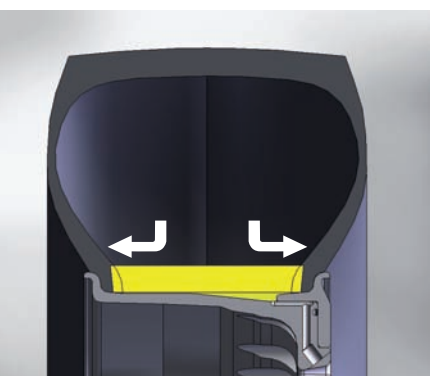

BeadLock effort
on tyre wall



Reinforced
Rubber



Easy mounting



No BeadLock



With BeadLock
Full mobility at low pressure

WHEEL COLOR OPTIONS



Matte Black
017



Argent Graphite
023



Sparkle Silver
047

All wheels are available in matte black, argent graphite or sparkle silver.

The colors you see may not be a totally accurate reproduction of the actual product. We strive to make our colors as accurate as possible, but these images are intended as a guide only and should not be regarded as absolutely correct.

www.hutchinsonrunflat.com
www.rockmonsterwheels.com

